

美格智能 SRM810 模组

5G NR LGA

| 5G LGA | SRM810 | IoT/ | /eMBB | 5G Sub-6GHz |
|------------|---------------------------------|------|-----------|------------------------|
| Release 16 | 30.0x41.0x2.7mm 5G 4G/3G网 | SA | NSA 5G | V516 + 5G LAN UE |
| R164 5 | 5G | | | |
| SRM810 | | | | |



MeiG Smart SRM810模组

5G NR LGA

MEIG 美格

股票代码: 602881

基本属性:

- : LGA
- : 30.0x41.0x2.7mm
- : <10g

模组速率:

- 5G NR Sub-6GHz:
 - MIMO 4*4, 256QAM
 - Downlink up to 2.0Gbps
 - Uplink up to 900Mbps
- LTE:
 - Downlink up to 400Mbps
 - Uplink up to 150Mbps
- DC-HSPA+:
 - Downlink up to 42.4Mbps
 - Uplink up to 5.76Mbps

驱动&工具:


- : Windows 7, Windows 8, Windows 8.1, Windows 10, Linux, Android
-
- USB / FOTA

模组接口:

- 1xUSB 2.0/USB 3.0
- 1xPCIe Gen2.0
- 2xUART
- 1xSDIO 3.0
- 2xSIM卡接口(1.8 / 3.0V)
- eSIM
- / /MIMOL 4M
- 1xSPI
- 1xI2C
- GPIOs

认证信息:

- CCC*/SRRC*/CTA*

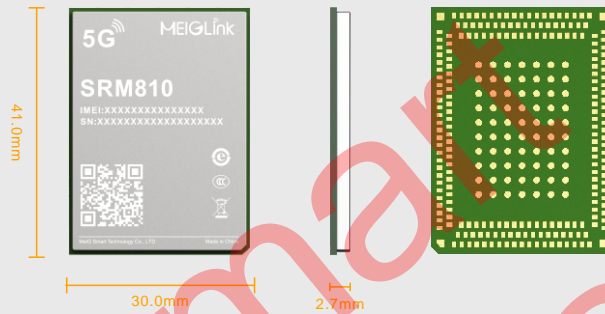

发射功率:

- Class 2 for N41/N78/N79
- Class 3 for LTE-FDD
- Class 3 for LTE-TDD

网络协议:

- RNDIS/NCM/IPv4/IPv6/TCP/UDP

环境温湿度特性:

- : -30°C to 75°C
- : -40°C to 85°C
- : -40°C to 90°C
- : 5%~95%

SRM810系列频段信息:

5G NR NSA: N41/N78/N79
5G NR SA: N1/N8/N28/N41/N78/N79
LTE-FDD: B1/B3/B5/B8
LTE-TDD: B34/B38/B39/B40/B41
WCDMA: B1/B8
5G DL 4x4 MIMO: N41/N78/N79

* 研发中

